


# EDS™ SERIES

## EXTERNAL DETECTION DEVICES

### EDS-2000 / EDS-2000 AM QUAD PIR AND MICROWAVE OUTDOOR SENSOR

- Up to 55kg (110Lbs) Pet immunity
- Quad Element Pyro sensor
- X-Band 10.525GHz/10.687GHz  
K-Band 24.125GHz microwave
- Form C (NC, NO, Common)
- IP55 rated
- 15m (49ft) WA detection range at  
2.4m (8.7ft) installation height
- Operation temperature:  
-35° to +55°C (-31°F + 131°F)
- Operation Voltage: 9.6 to 16 Vdc
- Over-voltage protection: 1kV per  
IEC61000-4-5 and EN-50130-4
- Relay contacts rate: 28Vdc, 0.1A
- EDS-2000 AM with Anti-Masking
- Dim: 175 x 70 x 45 mm (6.9" x 2.8" x 1.8")

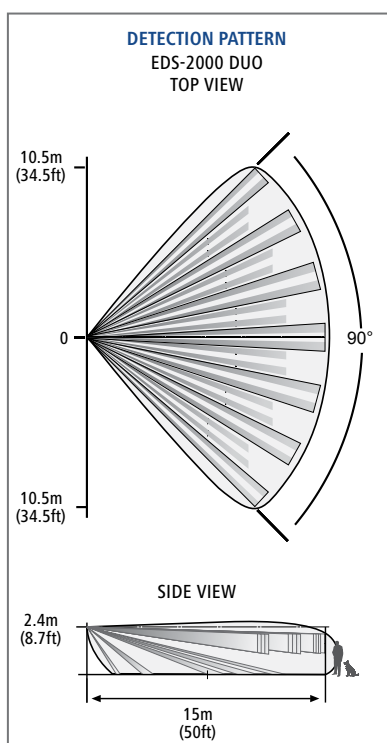

Installation Bracket kit

### EDS-3000 DOUBLE QUAD PIR AND MW OUTDOOR SENSOR

- Up to 55 kg (110 Lbs) Pet immunity
- Dual Quad Element Pyro sensor
- K-Band (24.125GHz) microwave
- Form C (NC, NO, Common)
- IP55 rated
- Coverage detection pattern of 90°  
adjustable within 180°
- Heavy duty polycarbonate housing
- Sealed electronics and optics
- Automatic temperature compensation
- User selectable sensitivity levels
- Superior filtering against sun  
and white light
- Operation temperature:  
-35°C to +55°C (-31°F + 131°F)
- Operation Voltage: 9.6 to 16 Vdc
- Over-voltage protection: 1kV per  
IEC61000-4-5 and EN-50130-4
- Relay contacts rate: 28Vdc, 0.1A
- Dim: 200 x 86 x 80 mm (7.9" x 3.4" x 3.2")

