



# 8CH PoE NVR

## NVR5-8200PX



5MP

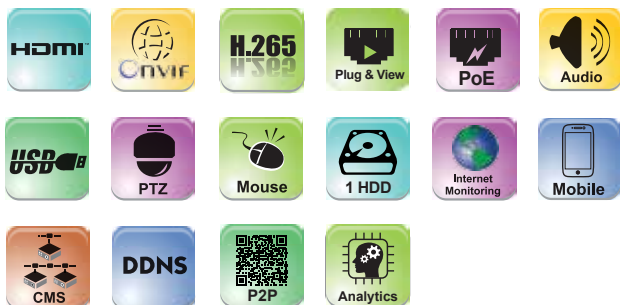

MODEL	NVR5-8200PX	
Video	Input	8CH RJ45 Direct Connection / Over Network
	Output	HDMI (1080P, 1280x1024, 1024x768)
	Decoding Format	H.265 / H.264
	Decoding Capabilities	1Ch - 5MP ; 4Ch - 2MP ; 8Ch - D1
	Analytics	Camera Tampering, Line Crossing, Sterile Area, Object Monitoring
Audio	Input	Depends on Camera Inputs
	Output	1Ch + Depends on Camera Outputs
	Two Way Audio	No
	Bandwidth	
Recording	Incoming	64Mbps
	Outgoing	64Mbps
	Real-Time Recording	8CH 5MP Real-Time
	8MP	No
	5MP	240FPS (NTSC)/200FPS (PAL)
	4MP	240FPS (NTSC)/200FPS (PAL)
	3MP	240FPS (NTSC)/200FPS (PAL)
	2MP (1080P)	240FPS (NTSC)/200FPS (PAL)
1.3MP (960P) and lower	240FPS (NTSC)/200FPS (PAL)	
Recording Modes	Schedule, Manual, Motion, Sensor, Analytics	
Playback	Playback Channels	8CH
	Search Mode	Time-Slice, Time, Event, File Management
Backup	USB	2 USB 2.0 Port
	DVD Burner	No
	Backup Format	AVI/DAT
Remote Application	Master Stream	Up to 8CH@Recording Resolution
	Sub-Stream	Depends on IPC
	Browser	Safari (Mac OS) IE (Windows Vista/7/8/10)
	CMS	Yes
	Mobile Application	Provision CAM2 for iOS/Android
User Access	10 Users Online with Professional Authority Management	
Alarm	Input	Depends on Camera
	Output	Depends on Camera
Storage	HDD	1 SATA (8TB)
	E-SATA	No
PTZ	Connection	Via Network
	Supported Controls	Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus
	RS-485	No
Network	Ethernet	100 Mbps (RJ-45)
	Protocol	TCP/IP, DHCP, DDNS, NTP, SMTP, P2P, RTSP
	ONVIF	Yes
PoE	Ports	Yes (8CH)
	Interface	10/100Mbps
	Standard	IEEE802.3AF
	Total Power	120W (Average 12.5W per Channel)
	Max. Power Output (Per Ch.)	~14W
Others	Power Supply	DC48V/2.5A
	Power Consumption (No HDD)	5W
	Dimension	W300xD250xH50mm
	Operation Temperature	0°C ~50°C