

## THC-T127-LMS 2 MP Dual Light Audio Fixed Turret Camera



- High quality imaging with 2 MP, 1920 × 1080 resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Up to 30 m IR distance for bright night imaging
- Up to 20 m white light distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP66)
- High quality audio with audio over coaxial cable, built-in microphone
- Smart-Hybrid light, optimize your security with flexible lighting options

## ▪ Specification

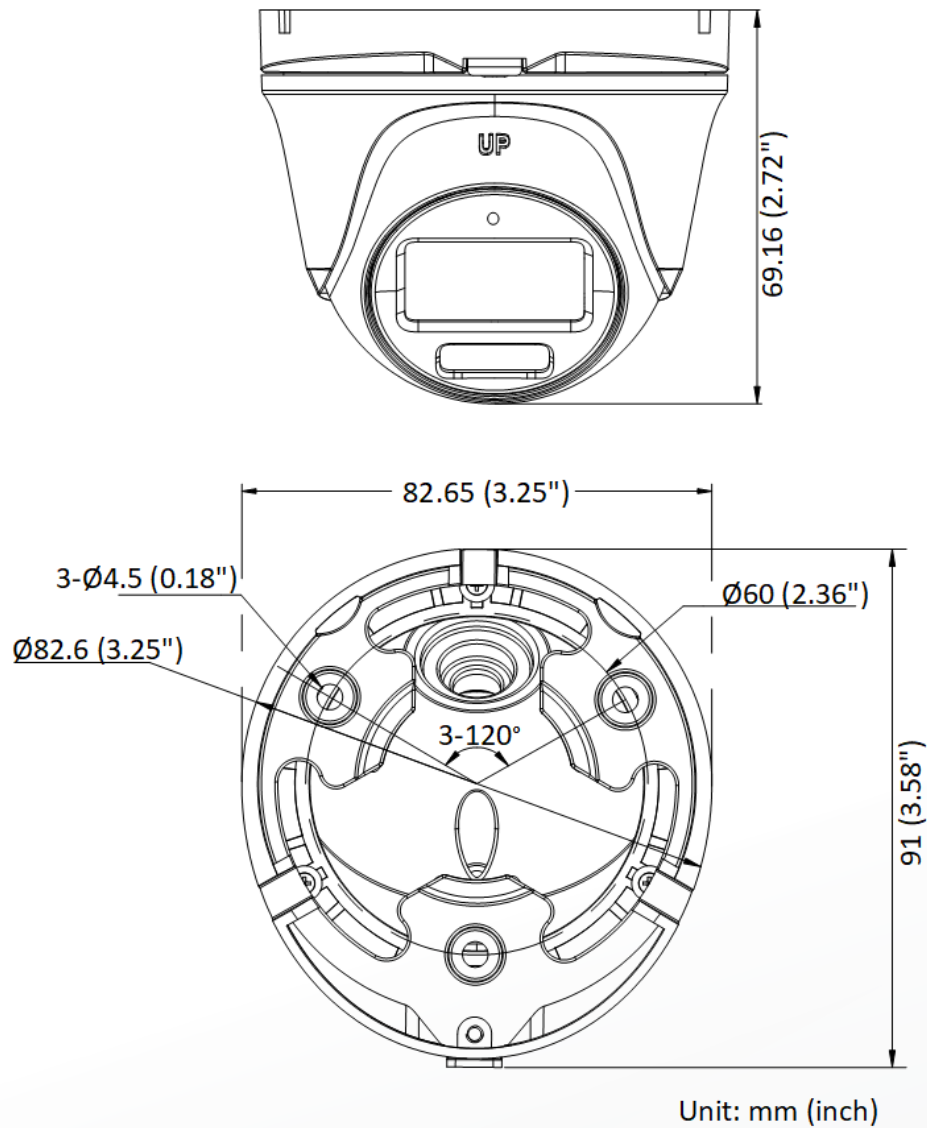
| Camera                   |                                                                                                                                          |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor             | 2 MP CMOS                                                                                                                                |
| Max. Resolution          | 1920 (H) × 1080 (V)                                                                                                                      |
| Min. Illumination        | 0.01 Lux @ (F2.0, AGC ON), 0 Lux with IR                                                                                                 |
| Shutter Time             | PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s                                                                                    |
| Day & Night              | ICR                                                                                                                                      |
| Angle Adjustment         | Pan: 0 to 360°, tilt: 0 to 75°, rotate: 0 to 360°                                                                                        |
| Signal System            | PAL/NTSC                                                                                                                                 |
| Lens                     |                                                                                                                                          |
| Lens Type                | Fixed focal lens, 2.8 mm and 3.6 mm optional                                                                                             |
| Focal Length & FOV       | 2.8 mm, horizontal FOV: 100°, vertical FOV: 55°, diagonal FOV: 116°<br>3.6 mm, horizontal FOV: 80°, vertical FOV: 43°, diagonal FOV: 95° |
| Lens Mount               | M12                                                                                                                                      |
| Illuminator              |                                                                                                                                          |
| Supplement Light Type    | White Light, IR                                                                                                                          |
| Supplement Light Range   | IR : up to 30 m<br>White Light : up to 20 m                                                                                              |
| Image                    |                                                                                                                                          |
| Image Settings           | Brightness, Sharpness, Smart IR                                                                                                          |
| Frame Rate               | TVI: 1080P @30 fps, 1080P @25 fps<br>AHD: 1080P @30 fps, 1080P @25 fps<br>CVI: 1080P @30 fps, 1080P @25 fps<br>CVBS: PAL/NTSC            |
| Day/Night Mode           | Auto/Color/BW (Black and White)                                                                                                          |
| Wide Dynamic Range (WDR) | Digital WDR                                                                                                                              |
| Image Enhancement        | DWDR/BLC/HLC/Global                                                                                                                      |
| White Balance            | Auto/Manual                                                                                                                              |
| AGC                      | Yes                                                                                                                                      |
| Interface                |                                                                                                                                          |
| Video Output             | Switchable TVI/AHD/CVI/CVBS                                                                                                              |
| Built-in Microphone      | Yes                                                                                                                                      |
| General                  |                                                                                                                                          |
| Material                 | Metal                                                                                                                                    |
| Dimension                | Ø82.65 mm × 69.16 mm (Ø3.25" × 2.72")                                                                                                    |
| Weight                   | Approx. 253 g (0.56 lb)                                                                                                                  |
| Operating Condition      | -40 °C to 60 °C (-40 °F to 140 °F). Humidity: 90% or less (non-condensation)                                                             |
| Communication            | HIKVISION-C                                                                                                                              |
| Language                 | English                                                                                                                                  |
| Power Supply             | 12 VDC ± 25%<br>*You are recommended to use one power adapter to supply the power for one camera.                                        |
| Consumption              | Max. 3.2 W                                                                                                                               |
| Approval                 |                                                                                                                                          |
| Protection               | IP66                                                                                                                                     |

# ▪ Available Model

THC-T127-LMS(2.8mm)




THC-T127-LMS(3.6mm)

# ▪ Dimension



▪ Accessory

▪ Optional

| DS-1272ZJ-110-TRS<br>Wall mount                                                   | DS-1275ZJ-SUS<br>Vertical pole mount                                              | DS-1276ZJ-SUS<br>Corner mount                                                      | DS-1280ZJ-XS<br>Junction box                                                        |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |   |  |
|  |  |  |  |

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

# HiLook