

## HD PRO


Series marked for the installer looking for a high-level camera emphasizing the difference in image quality. The Pro series cameras are suitable for indoor and outdoor applications where professional video surveillance is required.



# I4-33K0AP-MVF

## 40m IR 3K Motorized Lens Medium Bullet Camera

Equipped with a 2.8-12mm motorized lens, this 3K Bullet camera is designed for short distance surveillance systems (up to 40m) for both indoor and outdoor scenarios. Featuring 4in1 technology selectable by the camera COC menu, the DI-33K0AP-MVF is ideal for Plug & Play over existing analog infrastructure.

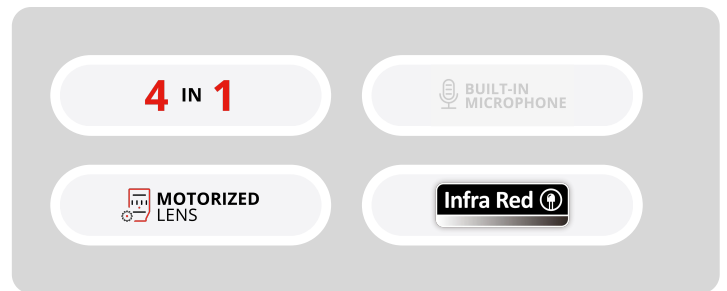

## MAIN FEATURES

- I4-33K0AP-MVF 40m IR 3K Motorized Lens Medium Bullet Camera
- Sensor: 1/2.5" 3K CMOS Sensor
- Selectable Output: 3K: 2592×1944 AHD/TVI 4MP: 2560×1440 AHD/TVI/CVI CVBS: 700TVL
- Lens: 2.8-12mm Mega-Pixel Motorized Vari-Focal (103°-38°)
- True Day&Night-ICR
- 3D-DNR

- Digital WDR/HLC/BLC
- Illumination: 40m (1 High-Power IR LED)
- IP67
- Weight: 680g
- Power: DC12V/450mA




<https://provision-isr.com>

## SPECIFICATIONS

| Video                  |                                                               |
|------------------------|---------------------------------------------------------------|
| Image Sensor           | 1/2.5" 3K CMOS Sensor                                         |
| Image Format           | 16:9                                                          |
| Effective Pixels       | 2944 × 1656                                                   |
| Scanning System        | Progressive                                                   |
| Min. Illumination      | Color : 0.01lux @F1.2, AGC ON B/W : 0lux with IR              |
| Day & Night            | True Day&Night-ICR                                            |
| Day & Night Modes      | Ext/Auto/Day/Night                                            |
| Compression            |                                                               |
| Resolution             | 3K: 2592x1944 AHD/TVI 4MP: 2560x1440 AHD/TVI/CVI CVBS: 700TVL |
| Frame Rate             | 3K @ 20FPS, 4MP @ 25FPS                                       |
| Image                  |                                                               |
| Backlight Compensation | BLC/HLC                                                       |
| S/N Ratio              | ≥52dB (AGC OFF)                                               |
| Privacy Zone           | no                                                            |
| Noise Reduction        | 3D-DNR                                                        |
| Image Enhancement      | Digital WDR, BLC, HLC                                         |
| On Screen Data         |                                                               |
| CoC Support            | Yes                                                           |
| OSD Menu               | Available via CoC Only                                        |
| Lens                   |                                                               |
| Field of View          | 2.8-12mm Mega-Pixel Motorized Vari-Focal (103°-38°)           |
| Iris                   | DC Iris                                                       |
| Lens Mount             | Ø14 Mount                                                     |

| Connectivity       |                                                                                    |
|--------------------|------------------------------------------------------------------------------------|
| Video Output       | 3K / 4MP (Selected by OSD Menu) AHD/TVI/CVI/CVBS + PAL/NTSC (Selected by OSD Menu) |
| Audio Connectivity | N/A                                                                                |
| Housing            |                                                                                    |
| Illumination       | 40m (1 High-Power IR LED)                                                          |
| Bracket            | 3-Axis Bracket                                                                     |
| Protection Rate    | IP67                                                                               |
| Dimensions         | 220.8*79.4*81.2mm                                                                  |
| Weight (gross)     | 680g                                                                               |
| Power              | DC12V/450mA                                                                        |
| Work Environment   | -30°C ~ 50°C , 10% ~ 90% humidity                                                  |

DIMENSIONS

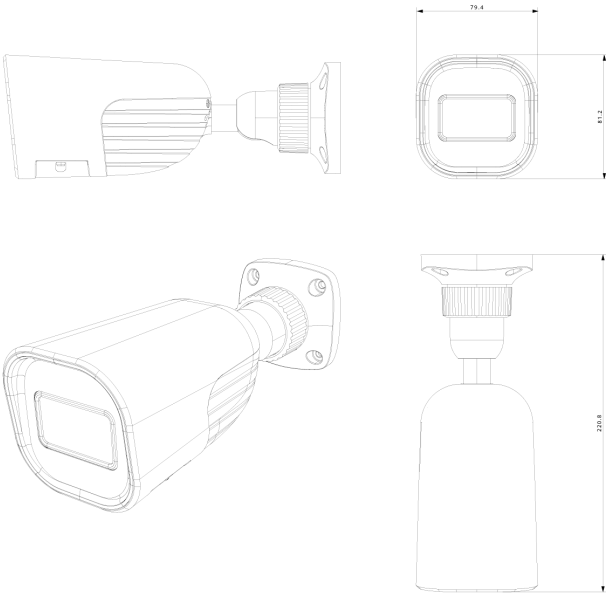

ACCESSORIES

