




FIRE & SECURITY



# SC570/WH/G2/EN

## Surface Contact

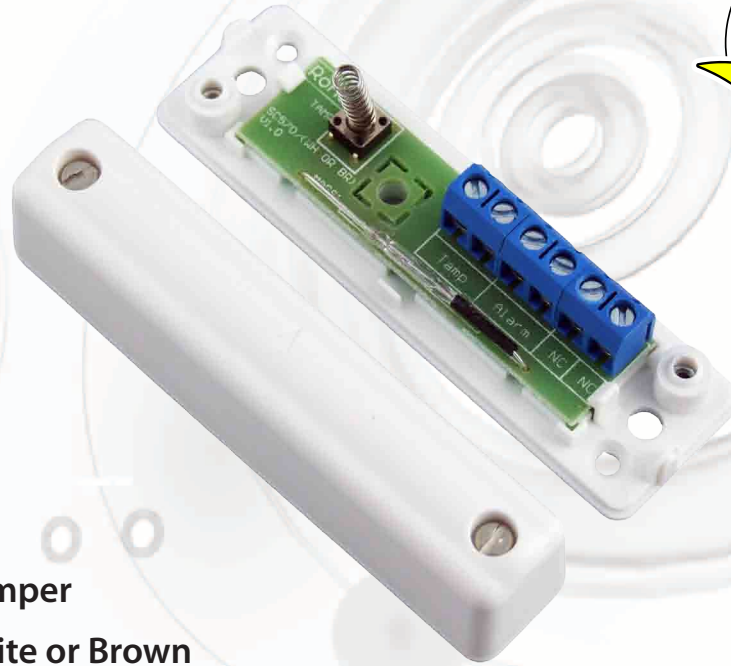

- 6 Terminals
- Cover and wall tamper
  - Available in White or Brown
  - EN50131-2-6 Grade 2
  - Environmental Class II

Connections	<b>6 Terminals</b>	Switching Current	<b>500mA @ 12Vdc</b>
Reed Switches	<b>1</b>	Contact Material	<b>Rhodium &amp; Ruthenium</b>
Pull-in Gap	<b>36mm (X) 27mm (Y)</b>	Temperature Range	<b>-15° C to +40° C</b>
Material	<b>High Impact Polystyrene</b>	Tamper	<b>Cover &amp; optional RFMS</b>
Contact Size mm	<b>85 x 25 x 21</b>	Colours	<b>White/Brown</b>
Magnet Size mm	<b>85 x 18 x 21</b>	Magnetic Interference Detection	<b>Yes</b>
Contact Form	<b>SPST form A</b>	Standards	<b>EN50131-2-6 Grade 2</b>
Voltage Range	<b>12v DC</b>	Environmental Class	<b>II</b>



FireBrand — **2Y-LINK** — CQR MAXIMAL — OSU GROUP OF COMPANIES —

**CQR Fire & Security**  
 125 Pasture Road, Moreton, Wirral, CH46 4TH, UK



Sales: 0151 606 1000 Tech: 0151 606 6311 [www.cqr.co.uk](http://www.cqr.co.uk) [info@cqr.co.uk](mailto:info@cqr.co.uk)

